

CONDUCTO S

HIGH PERFORMANCE, HOMOGENEOUS FLOOR COVERING
WITH ELECTROSTATIC CONDUCTIVE PROPERTIES

PERFORMANCE,
FEATURES & BENEFITS


- High wear resistance
- Guarantees the lasting elimination of electrostatic charges
- Hinder the aggregation of dust

RECOMMENDED USAGE

- Operating rooms in hospitals
- X-ray departments
- Laboratories
- Computer rooms
- Electronics manufactring

CONSTRUCTION

○ Non-directional homogeneous layer

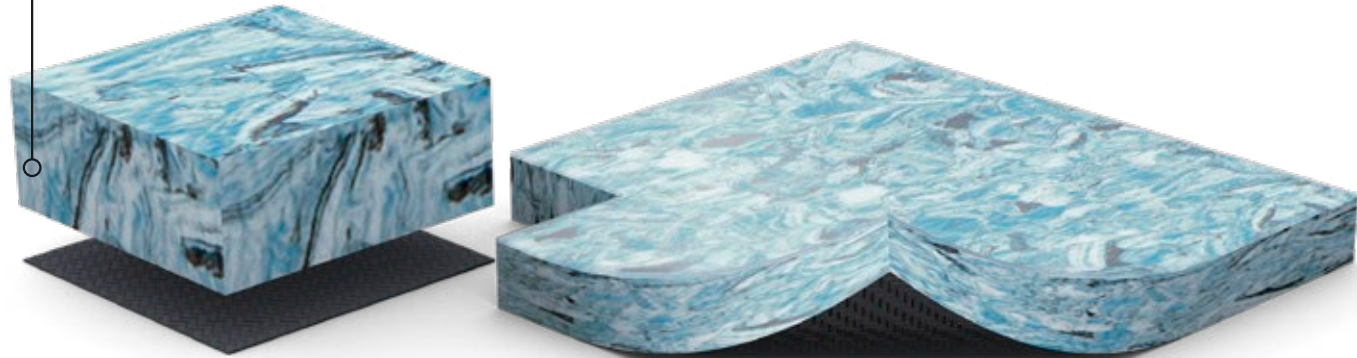


DESCRIPTION		TRIUMPH Silver Knight
TOTAL THICKNESS	2.0 mm	homogeneous
TOTAL WEIGHT	2.8 kg/m²	Type I.
ELECTRICAL RESISTANCE	≤10⁶ Ω	2.0 mm
EUROPEAN CLASSIFICATION	34 ▯▯▯▯ 43 ▯▯▯▯	2.0 mm
ESD PROTECTION		2 m
NO WAX		20 lm
Construction		2.8 kg/m²
Binder content	EN ISO 10581	
Total thickness	EN ISO 24346	
Wear layer thickness	EN ISO 24340	
Width of roll	EN ISO 24341	
Length of roll	EN ISO 24341	
Total weight	EN ISO 23997	
CLASSIFICATION		
European classification	ISO 10874	class: 34/43
PERFORMANCE		
Abrasion group	EN 660-2	T
Residual indentation	EN ISO 24343	max. 0.1 mm
Dimensional stability	EN ISO 23999	≤ 0.4 %
Fire resistance	EN 13501-1	class: Bfl-s1
Slip resistance	EN 13893	class: DS
Electrical resistance	EN 1815	< 2 kV
	EN 1081	R≤1×10⁶ Ω
Chemical resistance	EN ISO 26987	✓
Light fastness	EN ISO 105-B02	grade 6
Castor chair resistance	EN ISO 4918	✓
Warranty		10 year



COAST



SAND

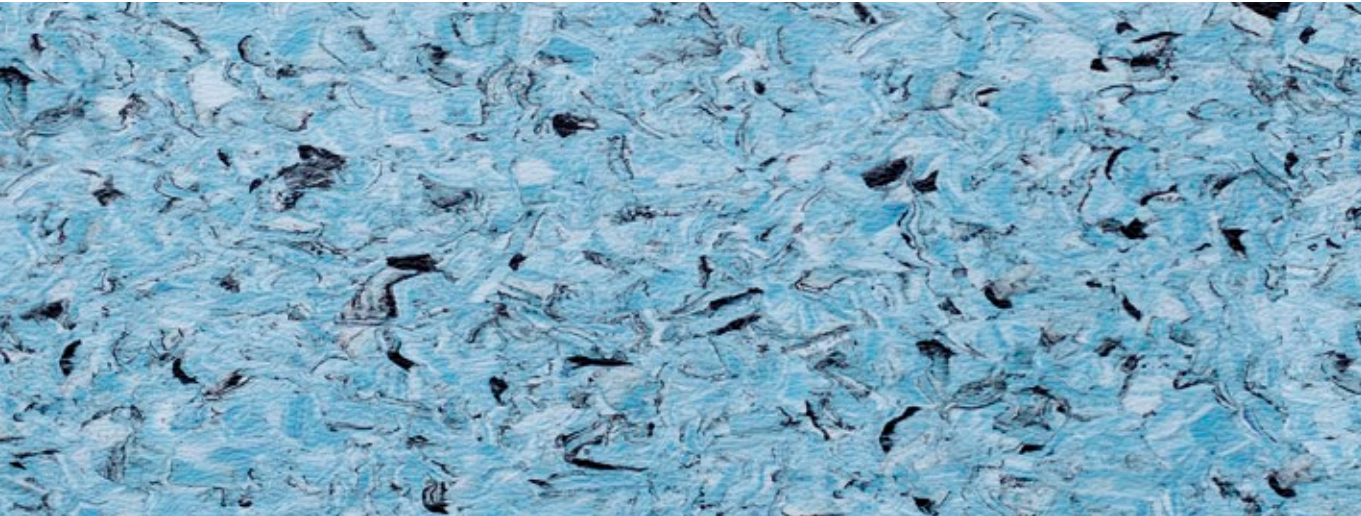

LAGOON