

GRABO

1905

COMMERCIAL

CYRENE SILVER KNIGHT



SAPPHERE



EYES




ECRU



MUSHROOM



POWDER

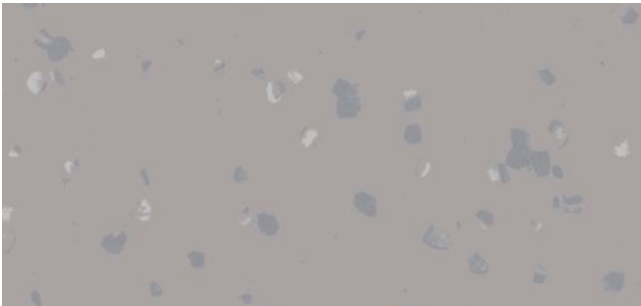

ELEPHANT



SATIN



WATERFALL



SPRING



LIME



DESERT



PEANUT



COCONUT



CANDY



FIRE



CARROT



KHAKI

DESCRIPTION		CYRENE SILVER KNIGHT
Construction		homogeneous
Binder content	EN ISO 10581	Type I.
Total thickness	EN ISO 24346	2.0 mm
Wear layer thickness	EN ISO 24340	2.0 mm
Width of roll	EN ISO 24341	2 m
Length of roll	EN ISO 24341	20 lm
Total weight	EN ISO 23997	2.8 kg/m ²
CLASSIFICATION		
European classification	ISO 10874	34/43
PERFORMANCE		
Abrasion group	MSZ EN 660-2	T
Residual indentation	EN ISO 24343	max. 0.1 mm
Dimensional stability	EN ISO 23999	max. 0.2 %
	EN ISO 23999	average 0.1 %
Fire resistance	EN 13501-1	class: Bfl-s1
Slip resistance	DIN 51130	R9
	EN 13893	DS
Electrical resistance	EN 1815	< 2 kV
Chemical resistance	EN ISO 26987	✓
Light fastness	EN ISO 105-B02	grade 6
Castor chair resistance	EN ISO 4918	✓
Surface treatment		Silver Knight iGUARD
Bacteriostatic activity	ISO 22196	>99%
Antiviral activity	ISO 21702	>99%
Seaming method		heat or cold welding
Warranty		10 year

Performance features & benefits

- Best dimensional stability
- Excellent abrasion resistance
- Unique non-directional design
- Low residual indentation
- Easy cleaning and maintenance
- Self-disinfecting
- Antistatic

Recommended usage


- Healthcare
- Education
- Offices
- Other public areas

Environmental attributes

- Phthalate free
- Solvent free
- Heavy metal free
- 100% recyclable
- NO WAX product
- No waste technology

Construction

- 1| Silver Knight iGuard Surface
- 2| Non-directional homogeneous layer

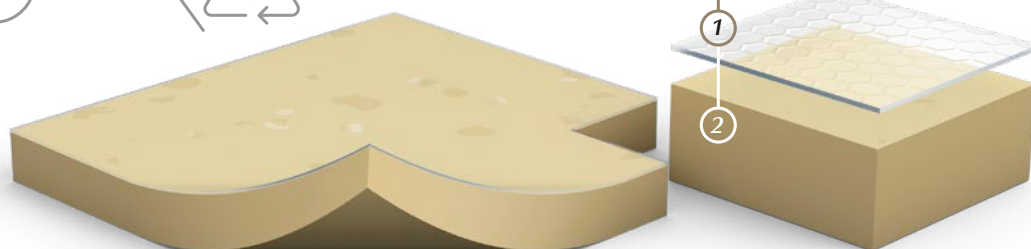

GRABOPLAST LTD.

H-9023 Győr, Fehérvári út 16/b. Telefon: (+36) 96 506-100
[instagram.com/graboplast](https://www.instagram.com/graboplast) | [facebook.com/graboplast](https://www.facebook.com/graboplast)
www.grabo1905.com

